


PROJECT:
TAG #:
QTY:
NOTES:

Please complete as much information as possible.

Replacement Coil Order Form

Steam Coil (Direct Steam Blast Type S or V)

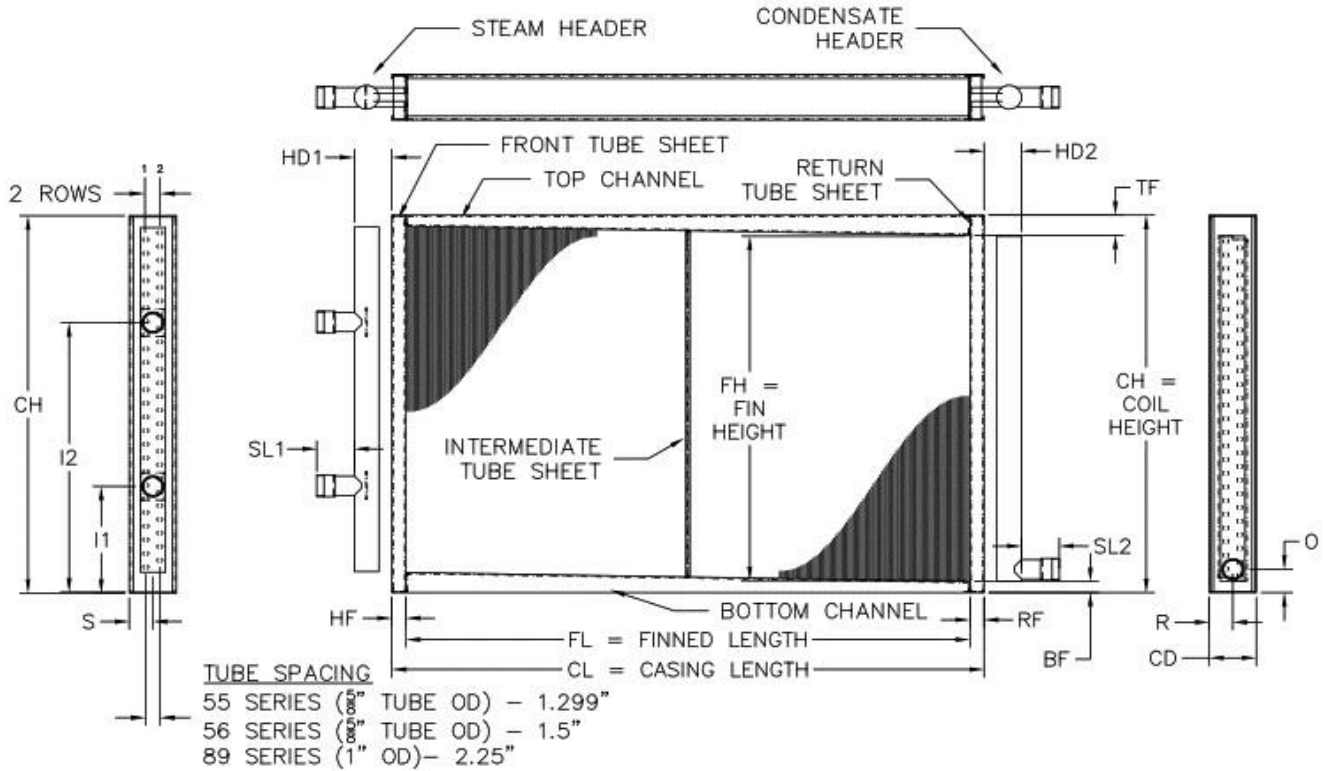

FINS		CASING							HD1/ HD2	CONNECTIONS						
FH	FL	BF	TF	CH	HF	RF	CL	CD	SL1	SL2	S1/S2	O	I1/I2	I3/I4	R	
ROWS				TUBE DIAMETER				(5/8" 1" _____)	FIN MATERIAL							
TUBES HIGH				TUBE MATERIAL				ALUM: (.008 .010 .016 .020 .025)								
TUBES ENTERING HEADER				COPPER: (.025 .028 .035 .049 .065)				COPPER: (.007 .010 .016 .020 .025)								
FIN TYPE (FLAT or TURBEX)				STEEL: (.035 .049 .065)				STEEL: (.010 .016)								
FINS PER INCH SPACING				SST: (.035 .049)				SST: (.008 .010)								
AIRFLOW DIRECTION (H or V)				CU/NI: (.035 .049)				CU/NI: (.007 .010)								
TUBE ORIENTATION (H or V)				ALUM: (.049 .065 .083)				CASING		(Galvanized 304L SST 316L SST)						
COIL HAND (RIGHT or LEFT)				HEADER MATERIAL/THICKNESS				(Copper M/L/K Sch 40/80 Steel Sch 40/80 304/316 SST)								
CONNECTION SIZE				CONNECTION MAT & TYPE				(Copper Brass Steel SST)		(MPT FPT Plain End Flanged)						
QTY INTERMEDIATE TUBE SHEETS				COATING (Phenolic Electrofin)				PRIORITY SHIPMENT		(5 day 10 day 15 day)						
OPTIONS (check in box)		VERTICAL AIRFLOW (circle) (sloped core field sloped)							NOTES							
Header Wrap		VERTICAL AIR FLOW ORIENTATION Specify the condensate connection location 														
Duct Mounting Holes																
Removable Channels																
Copper Ferrules																
Integral Drain Pan																
Lifting Lugs (Welded)																
Lifting Lugs (Bolted)																